ON WATER PERFORMANCE DATA

SUZUKI MARINE

DF150APX-MB

PERFORMANCE DATA

RPM RANGE	SPEED AV KM/H	FUEL L/H	FUEL L/KM
600	6.0 km/h	1.4 L/h	0.24 km/L
1000	5.5 km/h	1.9 L/h	0.34 km/L
1500	8.0 km/h	4.9 L/h	0.61 km/L
2000	10.5 km/h	7.8 L/h	0.74 km/L
2500	13.0 km/h	11.3 L/h	0.87 km/L
3000	16.0 km/h	16.0 L/h	1.00 km/L
3500	28.5 km/h	20.4 L/h	0.71 km/L
4000	40.0 km/h	25.1 L/h	0.63 km/L
4500	46.5 km/h	29.1 L/h	0.63 km/L
5000	53.0 km/h	42.4 L/h	0.80 km/L
5500	62.0 km/h	47.7 L/h	0.77 km/L
6000	64.5 km/h	49.6 L/h	0.77 km/L

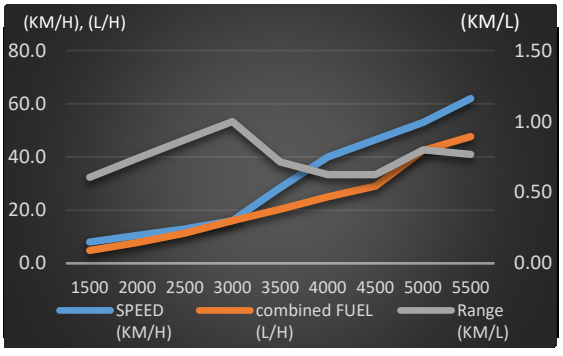

PEFORMANCE SUMMARY	
Top speed	66.km/h
Best cruising KM/L	1.67 km/l @ 4000rpm
Range *	143 km

* Based on 95% Fuel Capacity at Best Km/L

DISCLAIMER

Results on individual boats may vary due to many factors, including weather, tides, boat load, hull, lower unit & propeller conditions. Suzuki Australia P/L accepts no responsibility for the accuracy of these readings,

Vessel - Extreme 605 Centre Console

Hull type	V-shaped
Material	Aluminium
Length (LOA)	6.07 metres
Beam	2.34 metres
Dry Weight	700 kgs
Max Hp	150.0 HP
Fuel Tank Capacity	150 Litres
Steering Type	Hydraulic
Weight as tested (kg)	0 kgs

DF150APX-MB

Horsepower	150 HP
# of Cylinders	Inline-4, DOHC
Displacement (cc)	2,867 cc
Weight	241 kgs
Gear Ratio	2.50 :1
Mounting height hole	3

PROPELLER

Series	Stainless Steel
Diameter / Pitch (inch)	16" X 18.5"
Number of Blades	3
Part #	58200-93L11

TEST CONDITIONS

Test date	22-November-2025
Location	Mt Martha Port Phillip Bay
Crew	2
Air temperature	20.7 °C
Wind speed	11.0 metres
Sea Conditions	Smooth (0.1-0.5metres)
Fuel on board	50 Litres